

TUTORIAL

TUTORIAL PARA ATUALIZAR FIRMWARE NO TCBR200


THIN CLIENT BRASIL

Revisado em 09/2022


TUTORIAL

TUTORIAL PARA ATUALIZAR FIRMWARE NO TCBR200

1º Passo: Abra o Software **Factory tool 1.33.**

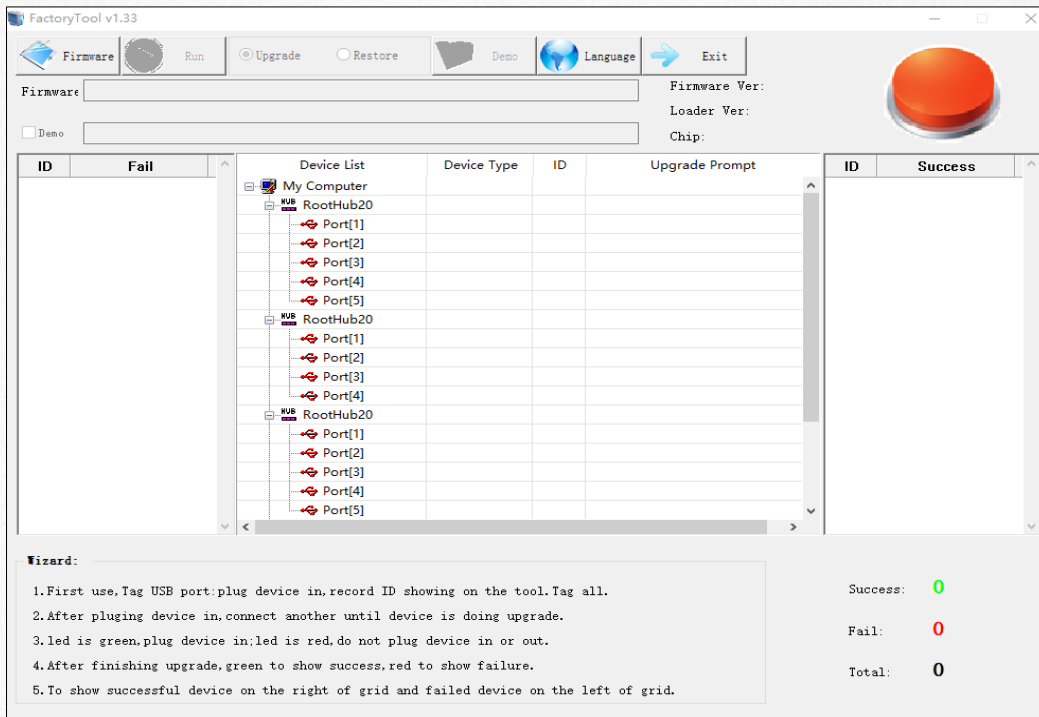


2º Passo: abra o arquivo imagem do firmware fornecido pela Thin Client Brasil.

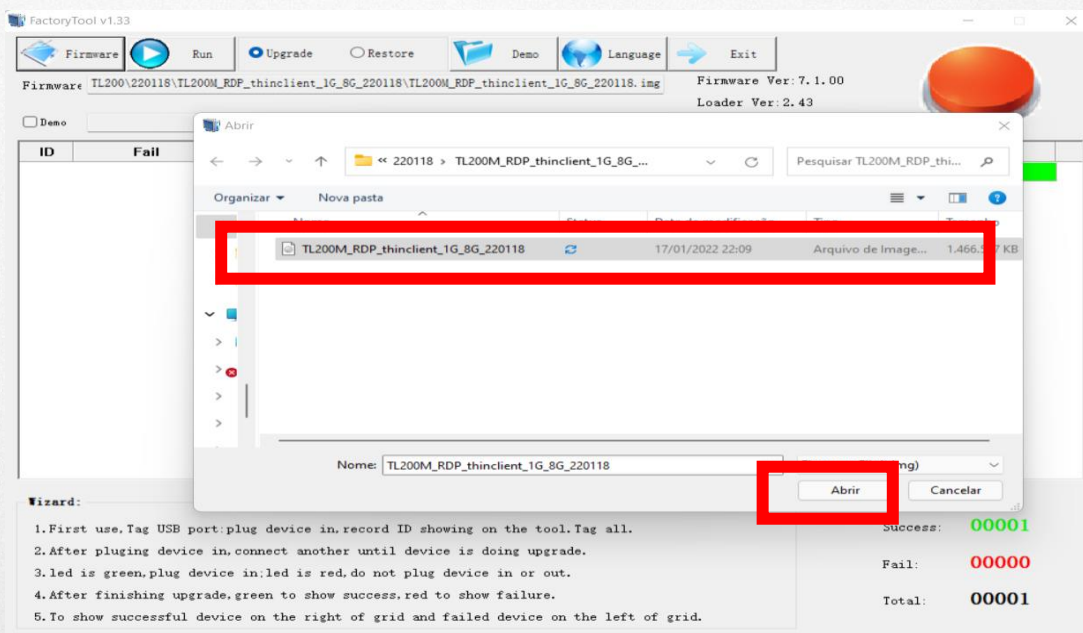


TUTORIAL

TUTORIAL DE FUNCIONALIDADE DO APLICATIVO THIN CLIENT MANAGER

3º Passo: Espere até que o arquivo carregue completamente.

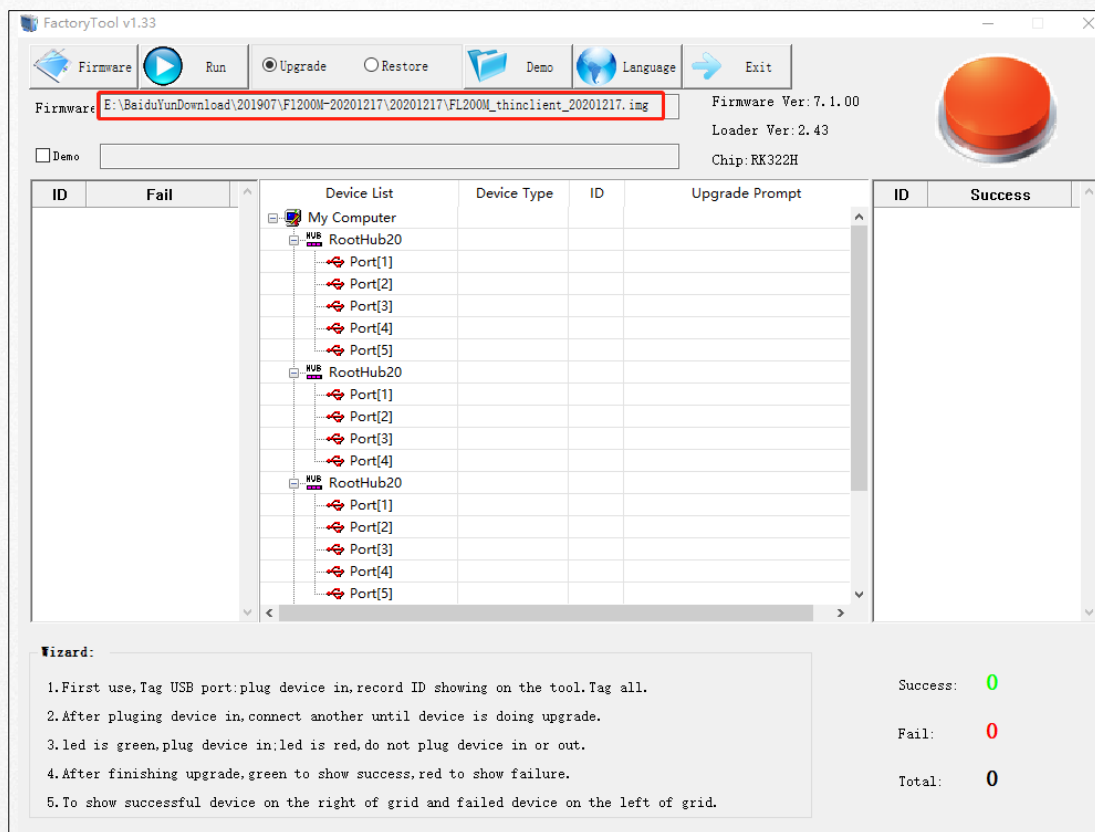

4º Passo: Instale o driver do thin client no PC que está usando para atualizá-lo.

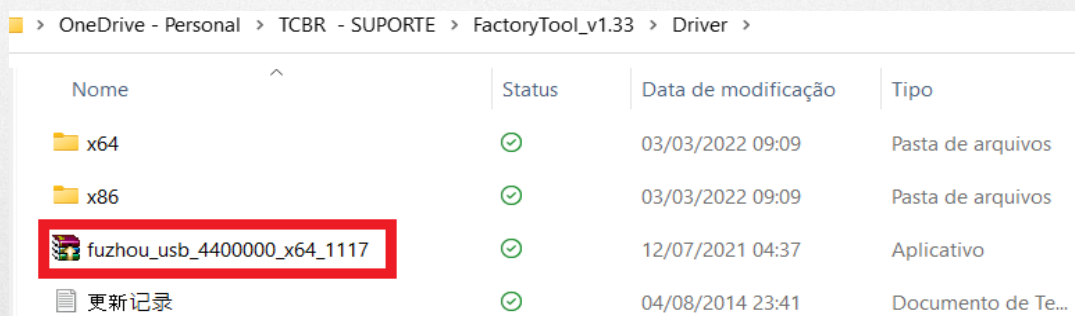

TUTORIAL

TUTORIAL DE FUNCIONALIDADE DO APLICATIVO THIN CLIENT MANAGER



5º Passo: Siga o passo a passo para iniciar o processo:

1. Conecte o cabo USB-USB no thin client e no PC;
2. Aperte o botão de atualização e **mantenha-o pressionado** até que o Software inicie o processo;
3. Conecte a fonte;
4. Ligue o Thin Client.



6º Passo: O Software irá reconhecer o thin client, como mostrado na figura (Loader 4, indica que a porta USB no PC é a 4).

RootHub20			
Port[1]			
Port[2]			
Port[3]			
Port[4]	Loader	4	

TUTORIAL

TUTORIAL DE FUNCIONALIDADE DO APLICATIVO THIN CLIENT MANAGER

7º Passo: Clique em RUN para iniciar o processo. **(ASSIM QUE O PROCESSO INICIAR, VOCÊ PODE SOLTAR O BOTÃO DE ATUALIZAÇÃO NO THIN CLIENT).**

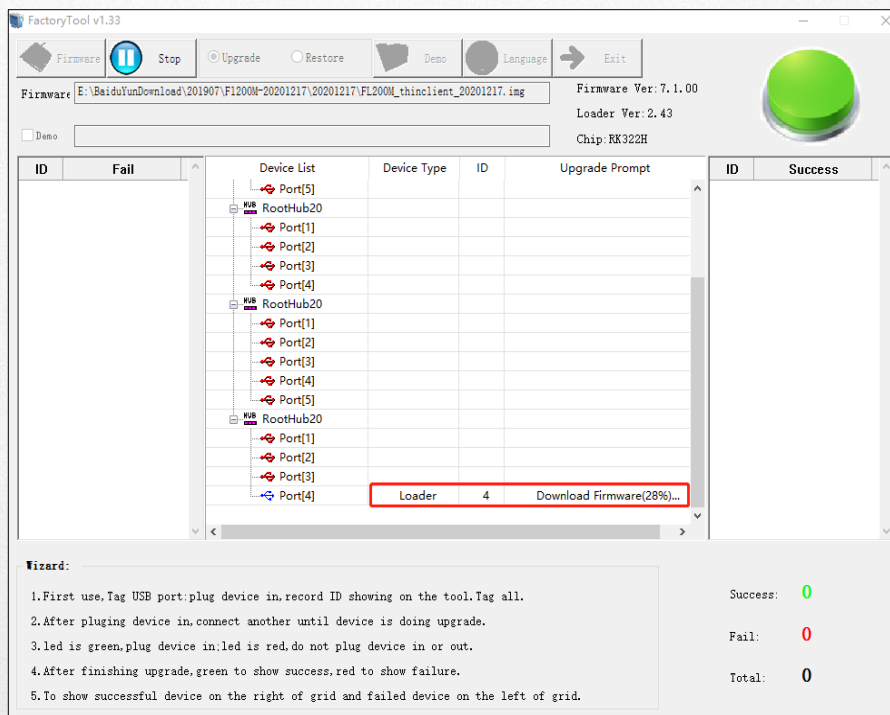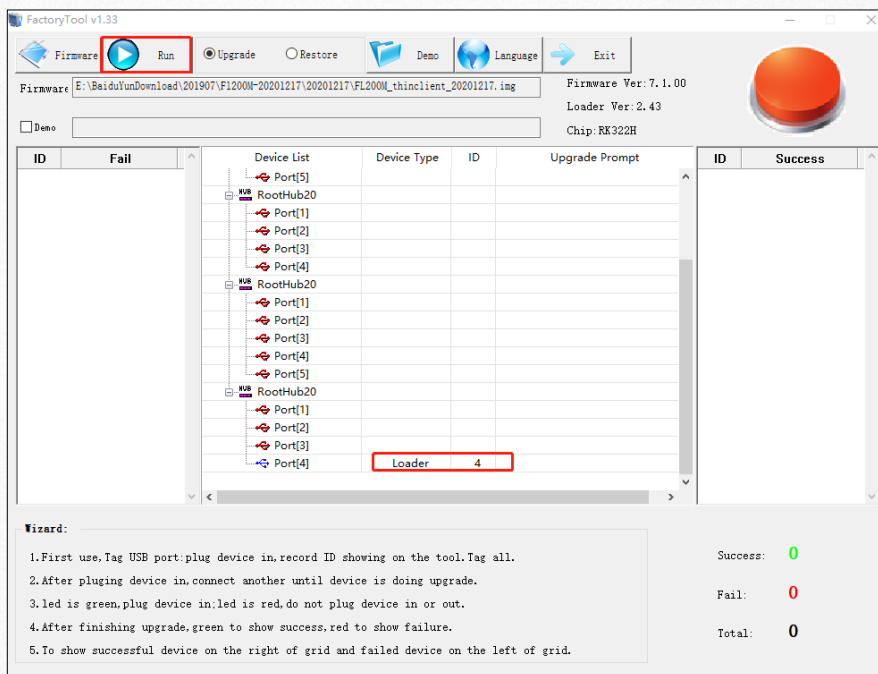

8º Passo: A atualização estará finalizada; desconecte o cabo USB e a fonte no THIN CLIENT

The screenshot displays the FactoryTool v1.33 application window. At the top, there are control buttons: Firmware, Stop, Upgrade, Restore, Demo, Language, and Exit. The Firmware path is set to E:\BaaiduYunDownload\201907\FI200M-20201217\20201217\FI200M_thinclient_20201217.img. The Firmware Ver is 7.1.00, Loader Ver is 2.43, and the Chip is RK322H. A green LED indicator is shown in the top right corner.

ID	Fail	Device List	Device Type	ID	Upgrade Prompt	ID	Success
		Port[5]				4	1:27
		RootHub20					
		Port[1]					
		Port[2]					
		Port[3]					
		Port[4]					
		RootHub20					
		Port[1]					
		Port[2]					
		Port[3]					
		Port[4]					
		Port[5]					
		RootHub20					
		Port[1]					
		Port[2]					
		Port[3]					
		Port[4]					

Wizard:

1. First use, Tag USB port; plug device in, record ID showing on the tool. Tag all.
2. After plugging device in, connect another until device is doing upgrade.
3. led is green, plug device in; led is red, do not plug device in or out.
4. After finishing upgrade, green to show success, red to show failure.
5. To show successful device on the right of grid and failed device on the left of grid.

Success: 1
Fail: 0
Total: 1

TUTORIAL

TUTORIAL DE FUNCIONALIDADE DO APLICATIVO THIN CLIENT MANAGER



Demais dúvidas, entre em contato:

suporte@thinclientbrasil.com

 [\(87\) 9 8109-5554](tel:(87)98109-5554)